

DEM FLOOR[©]

Bodenbeläge | Dekoration



PATENTED TECHNOLOGY



PATENTED TECHNOLOGY



www.demfloor.de

ELLITE COLLECTION

DEMFLOR[®]

Bodenbeläge | Dekoration

Diverse & Durable

UV Coating Layer

Wear Layer

Decor Film Layer

SPC Rigid Core

IXPE Underlayment



OPTIONS

- ▶ Painted Bevel
- ▶ IXPE Comfort Underlay
- ▶ IXPE Comfort Plus Underlay
- ▶ EIR - Registered Emboss



DEMFLOR[®]

Bodenbeläge | Dekoration

ELITE
COLLECTION

6
mm




PLANK

228 X 1220 X 6 mm



111

SEASHORE
OAK

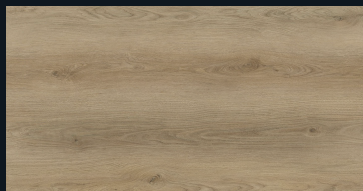

112

PEARL
OAK



113

SELECT
OAK



114

SAHARA
OAK



115

BOTANIC
OAK

116

CLEAR
OAK



117

BLOND
OAK




118

TAUPE
OAK



119

NATURE
OAK

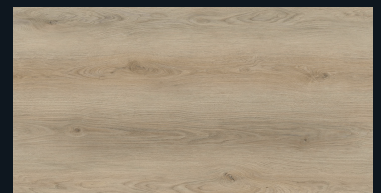

120

STORAGE
OAK



DEMFLOR®

Bodenbeläge | Dekoration


ELITE
COLLECTION

6
mm




HERRINGBONE

150 X 750 X 6 mm

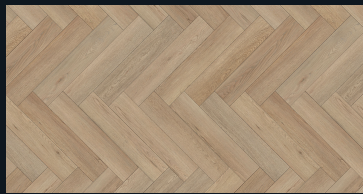


111

SEASHORE
OAK

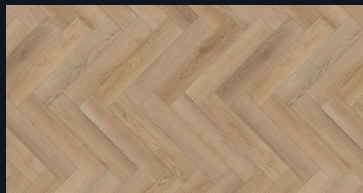


112

PEARL
OAK

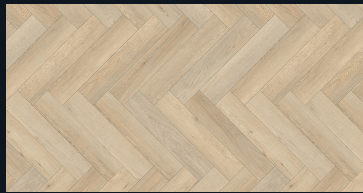


113

SELECT
OAK

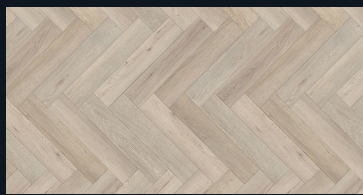

114

SAHARA
OAK

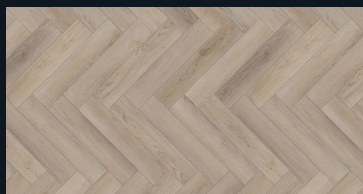


115

BOTANIC
OAK


116

CLEAR
OAK

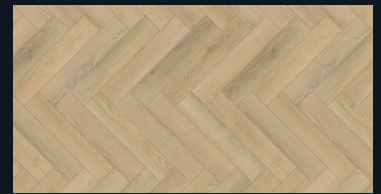

117

BLOND
OAK

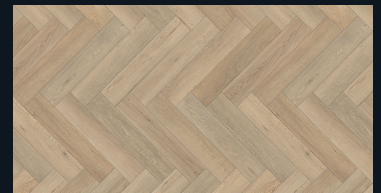


118

TAUPE
OAK




119

NATURE
OAK

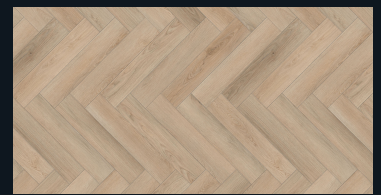










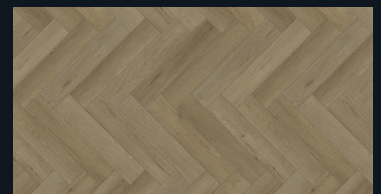


120


















STORAGE
OAK



ELITE COLLECTION

COLLECTION	DECOR	DIMENSIONS	EDGE	SURFACE	CLICK
 PLANK		228X1220	MICRO BEVEL	EIR	 <small>PATENTED TECHNOLOGY</small>
		PACKAGE(m ²)	PALETTE(m ²)	CONTAINER(20')	WARRANTY(Year)
		7 X  =1.950 m ² =19.47 Kg	64 X  =124.620 m ² =1.246.16 Kg	20 X  =2.492.31 m ² =24.923.14 Kg	15
 HERRINGBONE		150x750	MICRO BEVEL	EIR	 <small>PATENTED TECHNOLOGY</small>
		PACKAGE(m ²)	PALETTE(m ²)	CONTAINER(20')	WARRANTY(Year)
		14 X  =1.580 m ² =15.75 Kg	70 X  =110.250 m ² =1.102.50 Kg	22 X  =2.425.50 m ² =24.255.00 Kg	15

Technical Specification

	Surface treatment (UV)		YES
	Underlay	IXPE	1mm
	Thickness in Total	ISO24337	6mm
	Thickness of wear layers	EN429	0.5mm
	Weight in total	EN ISO 23997	9,5 kgs/sqm
	Dimension Stability	TS EN ISO 23999	Class 34
	Performance classification	23,34,43	
	Residual indentation after static load	TS EN ISO 24343-1:2007	0.01mm
	Slip Resistance	EN13893	DS
	Electrostatic Behaviour	1815:2016	Antistatic Floor Covering
	Floor Heating System	Suitable	Max.27 ^o C
	Antibacterial	ISO22196	Antibacterial
	Phthalate Analysis	Inhouse Method	Phthalate Free
	Emission of Formaldehyde	EN 717-1:2004	E1
	Fire Behaviour	EN13501-1 EN 9239-1:2010	BFL-S1
	Reaction to Fire	EN 11925-2:2020	B-s1-d0
	Thermal Resistance	EN 12667	0.296 W/(m.K)



ISO 9001:2015

ISO 14001:2015



DEM FLOOR[®]

Bodenbeläge | Dekoration

Visit our Website for more!



www.demfloor.de



Phthalate Free



100% Recyclable

