

DEM FLOOR[®]

Bodenbeläge | Dekoration

LUXURY
COLLECTION



UNICLIC[®]
PATENTED TECHNOLOGY

UNIDROP[®]
PATENTED TECHNOLOGY



www.demfloor.de

DEMFLOR[®]

Bodenbeläge | Dekoration

Diverse & Durable

UV Coating Layer

Wear Layer

Decor Film Layer

SPC Rigid Core

IXPE Underlayment



OPTIONS

- ▶ Painted Bevel
- ▶ IXPE Comfort Underlay
- ▶ IXPE Comfort Plus Underlay
- ▶ EIR - Registered Emboss



DEMFLOR®

Bodenbeläge | Dekoration

LUXURY
COLLECTION

5
mm



PLANK

228 X 1220 X 5 mm



101

AUTUMN
OAK



102

SUMMER
OAK



103

WINTER
OAK




104

SPRING
OAK


105

VINTAGE
OAK

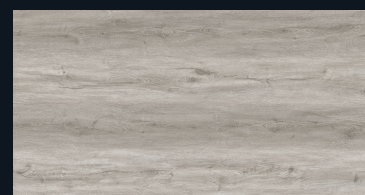


106

COTTON
OAK

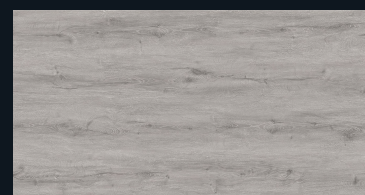


107

BLACK
OAK

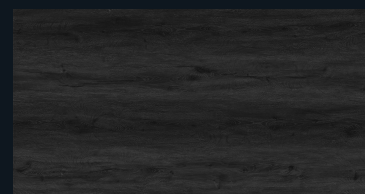

108

WHITE
OAK

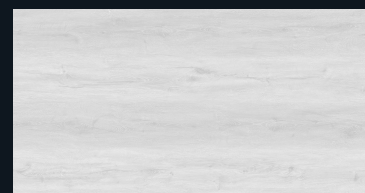

DEMFLOR[®]

Bodenbeläge | Dekoration


LUXURY
COLLECTION

5
mm




HERRINGBONE

150 X 610 X 5 mm

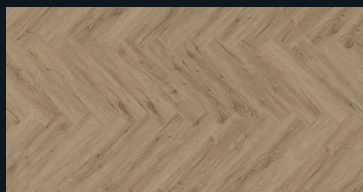


101

AUTUMN
OAK

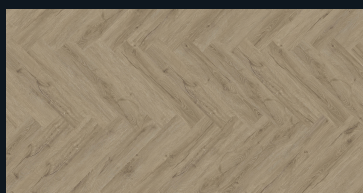


102

SUMMER
OAK

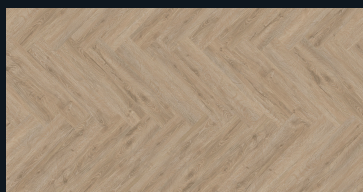

103

WINTER
OAK

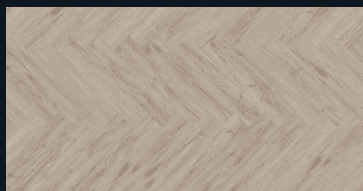


104

SPRING
OAK


105

VINTAGE
OAK

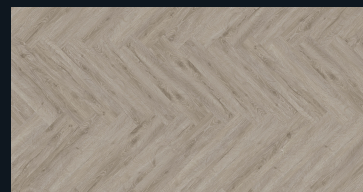


106

COTTON
OAK

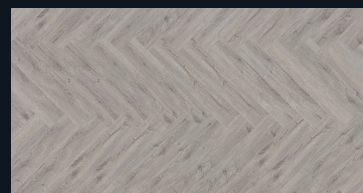


107

BLACK
OAK

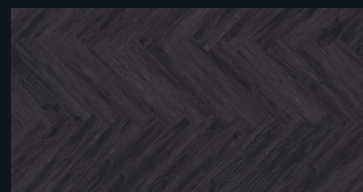







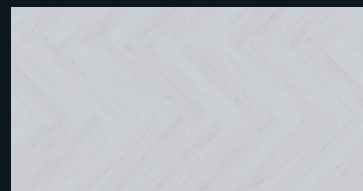





108

WHITE
OAK



LUXURY COLLECTION

COLLECTION	DECOR	DIMENSIONS	EDGE	SURFACE	CLICK
 PLANK		228X1220	MICRO BEVEL	EIR	 <small>PATENTED TECHNOLOGY</small>
		PACKAGE(m ²)	PALETTE(m ²)	CONTAINER(20')	WARRANTY(Year)
		9 X  =2.503 m ² =20.20 Kg	64 X  =160.220 m ² =1.292.80 Kg	20 X  =3.204.40 m ² =25.856.00 Kg	15
 HERRINGBONE		150x610	MICRO BEVEL	EIR	 <small>PATENTED TECHNOLOGY</small>
		PACKAGE(m ²)	PALETTE(m ²)	CONTAINER(20')	WARRANTY(Year)
		16 X  =1.460 m ² =11.71 Kg	108 X  =158.110 m ² =1.264.90 Kg	20 X  =3.162.24 m ² =25.297.92 Kg	15

Technical Specification

	Surface treatment (UV)		YES
	Underlay	IXPE	1mm
	Thickness in Total	ISO24337	5mm
	Thickness of wear layers	EN429	0.5mm
	Weight in total	EN ISO 23997	8,0 kgs/sqm
	Dimension Stability	TS EN ISO 23999	Class 34
	Performance classification	23,34,43	
	Residual indentation after static load	TS EN ISO 24343-1:2007	0.01mm
	Slip Resistance	EN13893	DS
	Electrostatic Behaviour	1815:2016	Antistatic Floor Covering
	Floor Heating System	Suitable	Max.27 ⁰ C
	Antibacterial	ISO22196	Antibacterial
	Phthalate Analysis	Inhouse Method	Phthalate Free
	Emission of Formaldehyde	EN 717-1:2004	E1
	Fire Behaviour	EN13501-1 EN 9239-1:2010	BFL-S1
	Reaction to Fire	EN 11925-2:2020	B-s1-d0
	Thermal Resistance	EN 12667	0.296 W/(m.K)



ISO 9001:2015
ISO 14001:2015



DEM FLOOR[®]

Bodenbeläge | Dekoration

Visit our Website for more!



www.demfloor.de



Phthalate Free



100% Recyclable

