

DEM FLOOR[®]

Bodenbeläge | Dekoration



PATENTED TECHNOLOGY



PATENTED TECHNOLOGY



www.demfloor.de

PURRÉ
COLLECTION

DEMFLOR[®]

Bodenbeläge | Dekoration

Diverse & Durable

UV Coating Layer

Wear Layer

Decor Film Layer

SPC Rigid Core

IXPE Underlayment



UNICLIC[®]
PATENTED TECHNOLOGY



UNIDROP[®]
PATENTED TECHNOLOGY

OPTIONS

- ▶ Painted Bevel
- ▶ IXPE Comfort Underlay
- ▶ IXPE Comfort Plus Underlay
- ▶ EIR - Registered Emboss



Phthalate Free



100%
Recyclable



DEMFLLOOR[®]

Bodenbeläge | Dekoration

PURÉ
COLLECTION



4
mm



5
mm




PLANK

182 X 1220 X 4 mm



PLANK XL

228 X 1220 X 5 mm

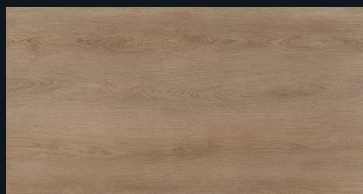

201

CANYON
OAK




202

DOMINICANO
OAK



203

HAVANNA
OAK

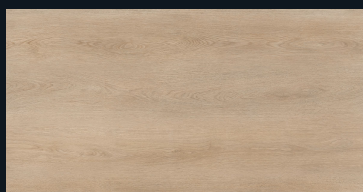

204

SLATE
OAK



205

BOSLAND
OAK


206

VALLEY
OAK




207

DESERT
OAK

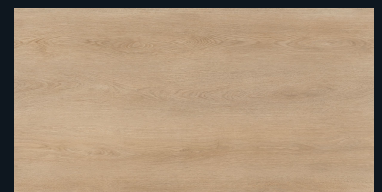

208

WALNUT
OAK

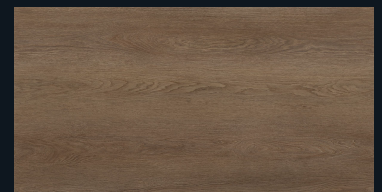


209

SCRAPED
OAK



210

CAMBRIDGE
OAK

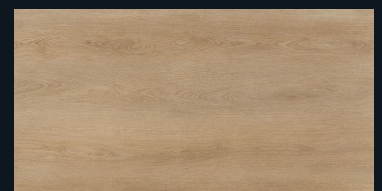

DEMFLOR[®]

Bodenbeläge | Dekoration



COLLECTION



4
mm




5
mm



HERRINGBONE
150 X 610 X 4 mm




HERRINGBONE XL
150 X 750 X 5 mm

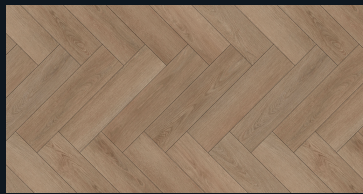

201

CANYON
OAK

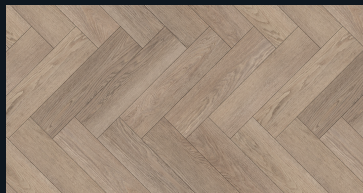


202

DOMINICANO
OAK




203

HAVANNA
OAK

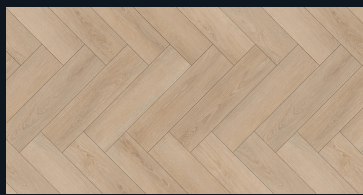

204

SLATE
OAK

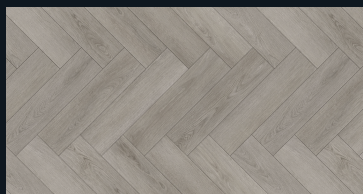


205

BOSLAND
OAK


206

VALLEY
OAK

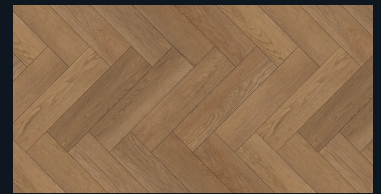

207

DESERT
OAK

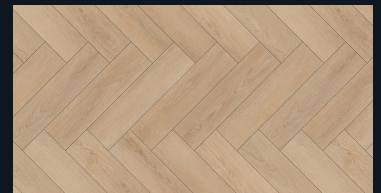


208

WALNUT
OAK




209

SCRAPED
OAK

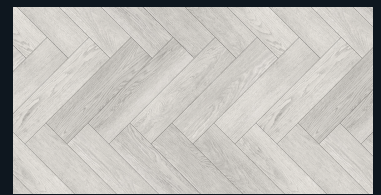





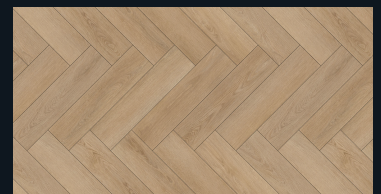
























210

CAMBRIDGE
OAK



PURÉ COLLECTION

COLLECTION	DECOR	DIMENSIONS	EDGE	SURFACE	CLICK
 PLANK		182x1220	MICRO BEVEL	STANDART	 WARRANTY (Year)
		PACKAGE(m ²)	PALETTE(m ²)	CONTAINER(20')	
		11 X  =2.443 m ² =19.60 Kg	65 X  =158.795 m ² =1.274.00 Kg	20 X  =3.175.90 m ² =25.480.00 Kg	15
 PLANK XL		228X1220	MICRO BEVEL	STANDART	 WARRANTY (Year)
		PACKAGE(m ²)	PALETTE(m ²)	CONTAINER(20')	
		9 X  =2.503 m ² =20.20 Kg	65 X  =160.220 m ² =1.292.80 Kg	20 X  =3.204.40 m ² =25.856.00 Kg	15













Technical Specification	Plank		Plank XL	
 Surface treatment (UV)		YES		YES
 Underlay	IXPE	NO	IXPE	1mm
 Thickness in Total	ISO24337	4mm	ISO24337	5mm
 Thickness of wear layers	EN429	0.3mm	EN429	0.3mm
 Weight in total	EN ISO 23997	8,0 kgs/sqm	EN ISO 23997	8,0 kgs/sqm
 Dimension Stability	TS EN ISO 23999	Class 34	TS EN ISO 23999	Class 34
 Performance classification	23,34,43		23,34,43	
 Residual indentation after static load	TS EN ISO 24343-1:2007	0.01mm	TS EN ISO 24343-1:2007	0.01mm
 Slip Resistance	EN13893	DS	EN13893	DS
 Electrostatic Behaviour	1815:2016	Antistatic Floor Covering	1815:2016	Antistatic Floor Covering
 Floor Heating System	Suitable	Max.27 ⁰ C	Suitable	Max.27 ⁰ C
 Antibacterial	ISO22196	Antibacterial	ISO22196	Antibacterial
 Phthalate Analysis	Inhouse Method	Phthalate Free	Inhouse Method	Phthalate Free
 Emission of Formaldehyde	EN 717-1:2004	E1	EN 717-1:2004	E1
 Fire Behaviour	EN13501-1 EN 9239-1:2010	BFL-S1	EN13501-1 EN 9239-1:2010	BFL-S1
 Reaction to Fire	EN 11925-2:2020	B-s1-d0	EN 11925-2:2020	B-s1-d0
 Thermal Resistance	EN 12667	0.296 W/(m.K)	EN 12667	0.296 W/(m.K)




















ISO 9001:2015
ISO 14001:2015



PURÉ COLLECTION

COLLECTION	DECOR	DIMENSIONS	EDGE	SURFACE	CLICK
 HERRINGBONE		150x610	MICRO BEVEL	STANDART	 WARRANTY (Year)
		PACKAGE(m ²)	PALETTE(m ²)	CONTAINER(20')	
		20 X  =1.830 m ² =14.70 Kg	84 X  =153.720 m ² =1.234.80 Kg	20 X  =3.074.40 m ² =24.696.00 Kg	15
 HERRINGBONE XL		150x750	MICRO BEVEL	STANDART	 WARRANTY (Year)
		PACKAGE(m ²)	PALETTE(m ²)	CONTAINER(20')	
		16 X  =1.800 m ² =14.40 Kg	77 X  =138.600 m ² =1.108.80 Kg	22 X  =3.049.20 m ² =24.393.60 Kg	15

Technical Specification	Herringbone		Herringbone XL	
 Surface treatment (UV)		YES		YES
 Underlay	IXPE	NO	IXPE	1mm
 Thickness in Total	ISO24337	4mm	ISO24337	5mm
 Thickness of wear layers	EN429	0.3mm	EN429	0.3mm
 Weight in total	EN ISO 23997	8,0 kgs/sqm	EN ISO 23997	8,0 kgs/sqm
 Dimension Stability	TS EN ISO 23999	Class 34	TS EN ISO 23999	Class 34
 Performance classification	23,34,43		23,34,43	
 Residual indentation after static load	TS EN ISO 24343-1:2007	0.01mm	TS EN ISO 24343-1:2007	0.01mm
 Slip Resistance	EN13893	DS	EN13893	DS
 Electrostatic Behaviour	1815:2016	Antistatic Floor Covering	1815:2016	Antistatic Floor Covering
 Floor Heating System	Suitable	Max.27 ⁰ C	Suitable	Max.27 ⁰ C
 Antibacterial	ISO22196	Antibacterial	ISO22196	Antibacterial
 Phthalate Analysis	Inhouse Method	Phthalate Free	Inhouse Method	Phthalate Free
 Emission of Formaldehyde	EN 717-1:2004	E1	EN 717-1:2004	E1
 Fire Behaviour	EN13501-1 EN 9239-1:2010	BFL-S1	EN13501-1 EN 9239-1:2010	BFL-S1
 Reaction to Fire	EN 11925-2:2020	B-s1-d0	EN 11925-2:2020	B-s1-d0
 Thermal Resistance	EN 12667	0.296 W/(m.K)	EN 12667	0.296 W/(m.K)



EMISSIONS DANS L'AIR INTERIEUR
A+
A+ A B C



floor score
ICC Technology Services



Phthalate Free



TS EN 14761+A1



EN ISO 16511



INTERNATIONAL ACCREDITATION SERVICE

ISO 9001:2015
ISO 14001:2015



23



33



34

DEM FLOOR[®]

Bodenbeläge | Dekoration

Visit our Website for more!



www.demfloor.de



Phthalate Free



100% Recyclable

