

# DEM FLOOR®

Bodenbeläge | Dekoration

COLLECTION  
ESSENTIALS



PATENTED TECHNOLOGY



PATENTED TECHNOLOGY



[www.demfloor.de](http://www.demfloor.de)

# DEMFLOR<sup>®</sup>

Bodenbeläge | Dekoration

## Diverse & Durable

UV Coating Layer

Wear Layer

Decor Film Layer

SPC Rigid Core

IXPE Underlayment



### OPTIONS

- ▶ Painted Bevel
- ▶ IXPE Comfort Underlay
- ▶ IXPE Comfort Plus Underlay
- ▶ EIR - Registered Emboss





# DEMFLOOR<sup>®</sup>

Bodenbeläge | Dekoration



NOVOTON  
SOLFO

5  
mm



STONE  
305 X 610 X 5 mm



STONE XL  
305 X 1220 X 5 mm




801

CONCRETE  
LIGHT

805

CARRARA  
MARMOR

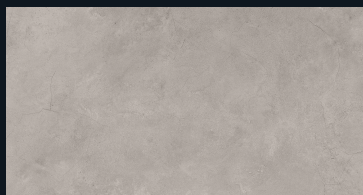


802

CONCRETE  
SAND

806

BOTTICINO  
LIGHT

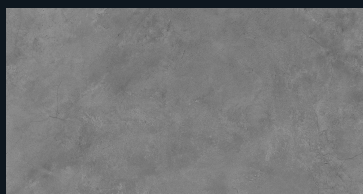

803

CONCRETE  
GREY

807

BOTTICINO  
DARK




804













CONCRETE  
DARK

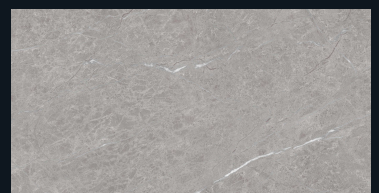
















808

MONREAL  
SLATE



# STONE COLLECTION

COLLECTION	DECOR	DIMENSIONS	EDGE	SURFACE	CLICK
 <b>STONE</b>		305X610	MICRO BEVEL	STANDART	 <small>PATENTED TECHNOLOGY</small> WARRANTY (Year)
		PACKAGE(m <sup>2</sup> )	PALETTE(m <sup>2</sup> )	CONTAINER(20')	
		11 X  =2.047 m <sup>2</sup> =16.37 Kg	78 X  =159.630 m <sup>2</sup> =1.277.05 Kg	20 X  =3.192.62 m <sup>2</sup> =25.540.94 Kg	15
 <b>STONE XL</b>		305X1220	MICRO BEVEL	STANDART	 <small>PATENTED TECHNOLOGY</small> WARRANTY (Year)
		PACKAGE(m <sup>2</sup> )	PALETTE(m <sup>2</sup> )	CONTAINER(20')	
		6 X  =2.230 m <sup>2</sup> =17.86 Kg	72 X  =160.750 m <sup>2</sup> =1.285.98 Kg	20 X  =3.214.94 m <sup>2</sup> =25.719.55 Kg	15

Technical Specification		Stone	Stone XL
 Surface treatment (UV)		YES	YES
 Underlay	IXPE	NO	IXPE 1mm
 Thickness in Total	ISO24337	4mm	ISO24337 5mm
 Thickness of wear layers	EN429	0.3mm	EN429 0.3mm
 Weight in total	EN ISO 23997	8,0 kgs/sqm	EN ISO 23997 8,0 kgs/sqm
 Dimension Stability	TS EN ISO 23999	Class 34	TS EN ISO 23999 Class 34
 Performance classification	23,34,43		23,34,43
 Residual indentation after static load	TS EN ISO 24343-1:2007	0.01mm	TS EN ISO 24343-1:2007 0.01mm
 Slip Resistance	EN13893	DS	EN13893 DS
 Electrostatic Behaviour	1815:2016	Antistatic Floor Covering	1815:2016 Antistatic Floor Covering
 Floor Heating System	Suitable	Max.27 <sup>0</sup> C	Suitable Max.27 <sup>0</sup> C
 Antibacterial	ISO22196	Antibacterial	ISO22196 Antibacterial
 Phthalate Analysis	Inhouse Method	Phthalate Free	Inhouse Method Phthalate Free
 Emission of Formaldehyde	EN 717-1:2004	E1	EN 717-1:2004 E1
 Fire Behaviour	EN13501-1 EN 9239-1:2010	BFL-S1	EN13501-1 EN 9239-1:2010 BFL-S1
 Reaction to Fire	EN 11925-2:2020	B-s1-d0	EN 11925-2:2020 B-s1-d0
 Thermal Resistance	EN 12667	0.296 W/(m.K)	EN 12667 0.296 W/(m.K)



EMISSIONS DANS L'AIR INTERIEUR  
**A+**  
A+ A B C



floor score  
ICC Services



Phthalate Free



TS EN 14761+A1



EN ISO 16511



INTERNATIONAL ACCREDITATION SERVICE

**ISO 9001:2015**  
**ISO 14001:2015**



23



33



34



# DEM FLOOR<sup>®</sup>

Bodenbeläge | Dekoration

Visit our Website for more!



[www.demfloor.de](http://www.demfloor.de)



Phthalate Free



100% Recyclable

